

# M2C-M-15



### Dimensions

- Width x Height x Depth: 412 x 351 x 78 mm
- Weight: 7,5 kg ± 10%

### Housing

- Chassis: Aluminium, black anodized
- Cover electronics: Steel, RAL 9005 powder coated
- Front: Antireflex glass / Resistive Touch

### Display

- 15" TFT Display
- Resolution: 1024 x 768
- Brightness: 350 cd/m<sup>2</sup>
- Full range dimming: 0-100 %
- With or without Resistive Touch

<b>Video Input</b>		2 x DVI Input 1 x VGA Input
<b>Interface</b>	Feature	1 x USB Touch 2 x USB back (connected to USB front) 2 x USB front (behind hatch)
<b>Power Options</b>	DC	24 VDC
	AC	230/115 VAC (50/60Hz)
	DCAC	24 VDC, 230/115 VAC (50/60Hz)
	Power Rating	30 VA
<b>Environment</b>	Operating Temp.	-15 to +55 °C
	Storage Temp.	-20 to +70 °C
	IP Rating	IP66 (front) - IP20 (rear)
<b>Compass Safe Distance</b>	Standard Compass	0.90 m in all directions
	Steering Compass	0.65 m in all directions
<b>Type Approval</b>		DNV, Tested according to EN 60945 EU-RO-MR <sup>(*)</sup>



(\*) expected Q1/2023

Options and additional features are configurable. Contact your Sonove sales representative for further information. Depending on the product configuration, interfaces or slot brackets may differ from the figures in this document.

# M2C-M-15



## Drawings Standard

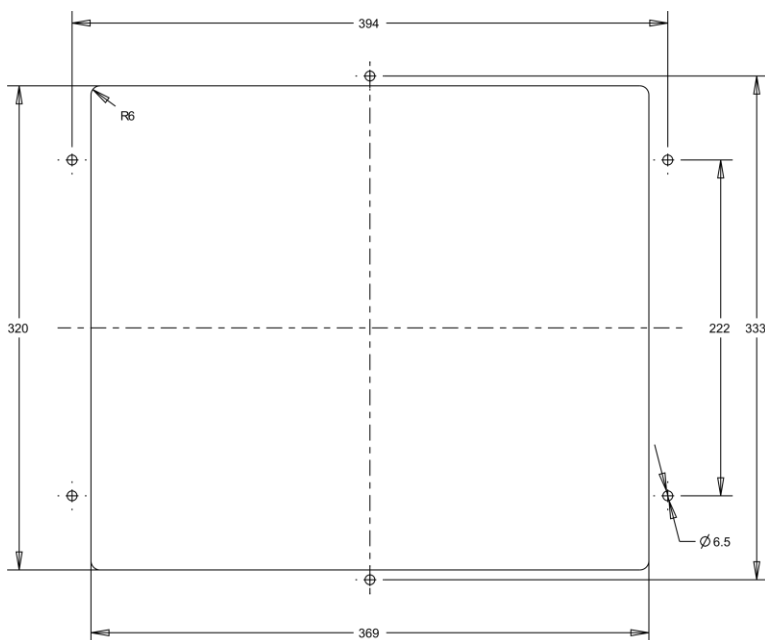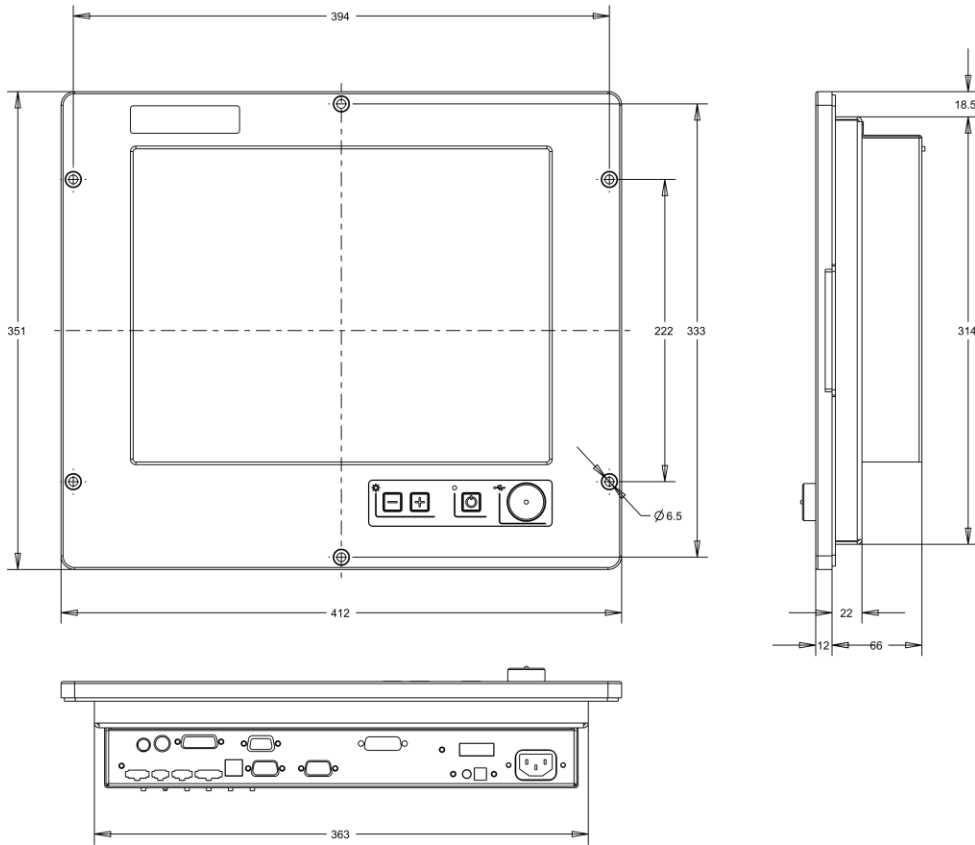

Sonove GmbH  
Hindelanger Str. 33  
87527 Sonthofen  
Deutschland

Tel. +49 8321 67466 200  
Fax +49 8321 67466 199  
marine@sonove.com