


# M2-M-27 FM

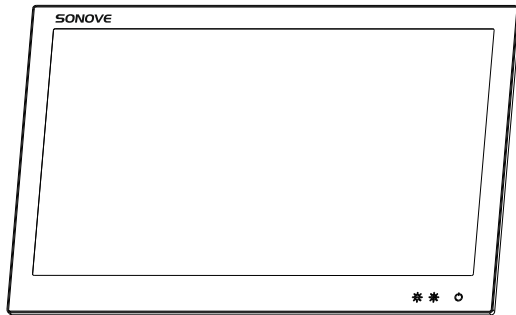

### Dimensions

- Width x Height x Depth: 645 x 411 x 69 mm
- Cutout (W x H): 633 x 399 mm
- Weight: 14 kg ± 10%


### Housing

- Chassis: Aluminium, RAL 9005 powder coated
- Cover electronics: Steel, RAL 9005 powder coated
- Front: Antireflex glass

### Display

- 27" TFT Display
- Resolution: 1920 x 1080
- Brightness: 300 cd/m<sup>2</sup> (CT: 270 cd/m<sup>2</sup>)
- Contrast ratio: 5000:1
- Full range dimming: 0-100 %
- With or without PCAP Multi-Touch

### User Controls



- Brightness Control + LED
- Power On/Off + Status LED

<b>Video Input</b>		2 x DVI Input 1 x VGA Input
<b>M2 Controller Board</b>	Feature	1 x RS232, RS485/422 (configurable) 1 x Internal Alarm Buzzer 1 x Touch USB 1 x BUZZER OUTPUT 1 x EXT LED (2 LEDs) 1 x EXT BKLT CTRL (2 Buttons UP/DOWN, 1 Potentiometer) 1 x SOURCE SELECT (Video Input)
<b>Power Options</b>	DC	24 VDC
	AC	230/115 VAC (50/60Hz)
	DCAC	24 VDC, 230/115 VAC (50/60Hz)
	Power Rating	30 VA
<b>Environment</b>	Operating Temp.	-15 to +55 °C
	Storage Temp.	-20 to +70 °C
	IP Rating	IP66 (front) - IP20 (rear)
<b>Compass Safe Distance</b>	Standard Compass	1.00 m in all directions
	Steering Compass	0.80 m in all directions
<b>Type Approval</b>		DNV, Tested according to EN 60945 EU-RO-MR <sup>(*)</sup>



<sup>(\*)</sup> expected Q1/2023

Options and additional features are configurable. Contact your Sonove sales representative for further information. Depending on the product configuration, interfaces or slot brackets may differ from the figures in this document.

# M2-M-27 FM



## Drawings

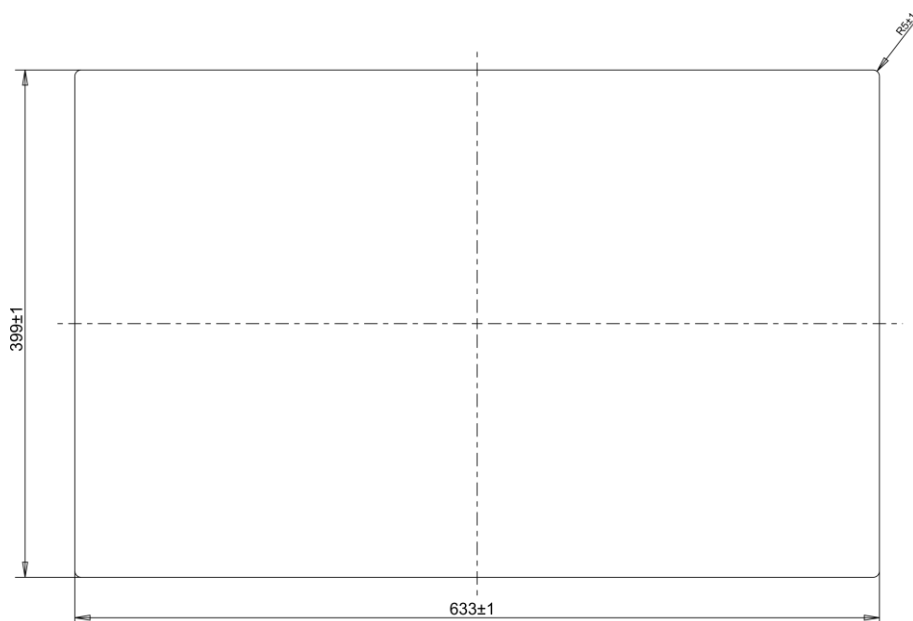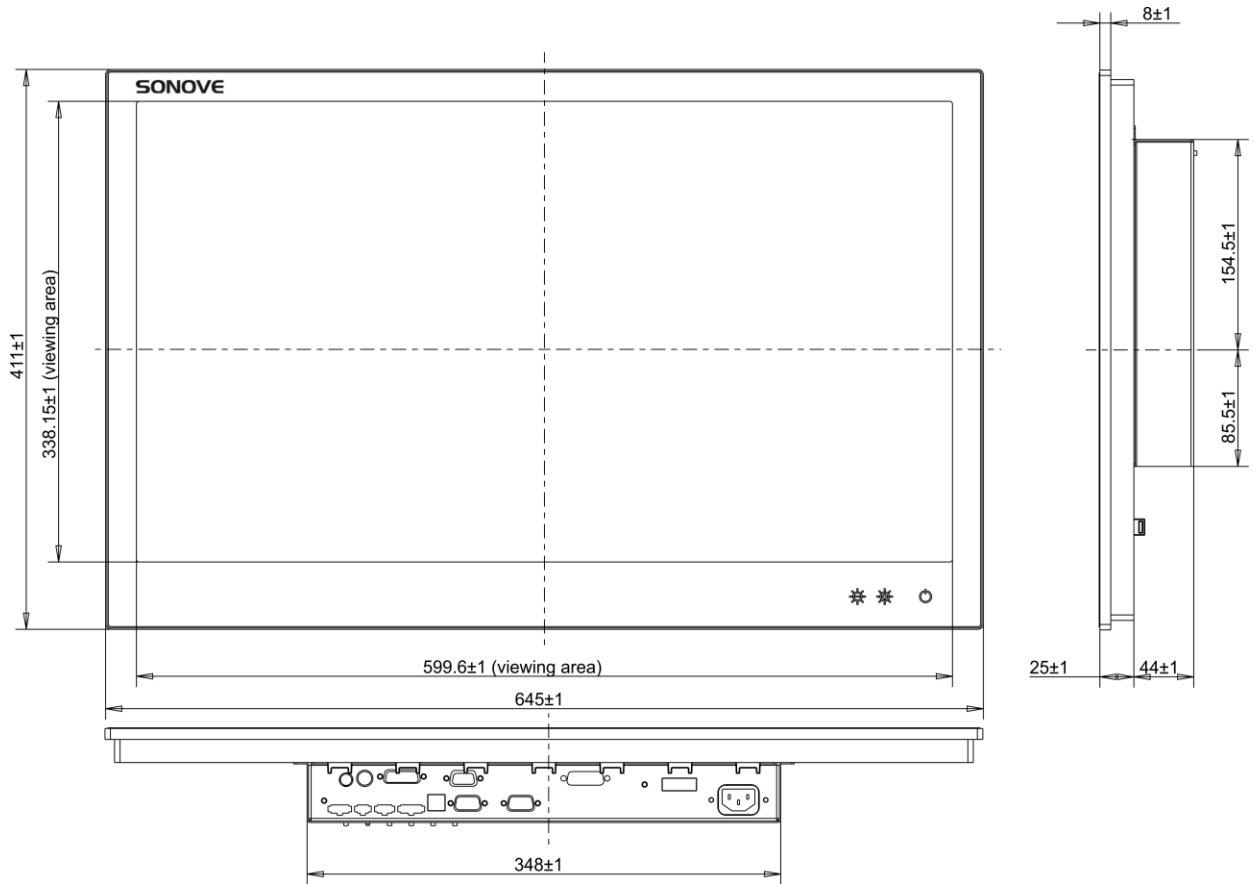

Sonove GmbH  
Hindelanger Str. 33  
87527 Sonthofen  
Deutschland

Tel. +49 8321 67466 200  
Fax +49 8321 67466 199  
marine@sonove.com