

# M2-PPC-24HB FM (TG)

11th Generation Intel® Core™ Processors



### Dimensions

- Width x Height x Depth: 588 x 375 x 75 mm
- Cutout (W x H): 576 x 363 mm
- Weight: 11,5 kg ± 10%

### Housing

- Chassis: Aluminium, RAL 9005 powder coated
- Cover electronics: Steel, RAL 9005 powder coated
- Front: Glass, antireflex coated both sides

### Display

- 24" TFT High Bright Display
- LED Backlight
- Resolution: 1920 x 1080
- Brightness: 1000 cd/m<sup>2</sup>
- Full range dimming: 0-100 %
- With or without PCAP Multi-Touch

<b>System</b>	Processor	11th Generation Intel® Core™ Processors Intel® Core™ i7-1185GRE, 4 Cores, 12M Cache, 1.80 GHz up to 4.40 GHz Intel® Core™ i5-1145GRE, 4 Cores, 8M Cache, 1.50 GHz up to 4.10 GHz	
	Memory	Up to 64GB, Dual channel DDR4 up to 3200MHz	
	Storage	1 x M.2 SSD up to 1TB or SATA3.0/PCIe Gen3 x4 NVMe 2 x SSD up to 2TB RAID 0/1/5	
<b>Graphics</b>	Controller	Intel® Iris® Xe Graphics for i7/i5 Processors	
	Feature	OpenGL 4.5, DirectX 12, OpenCL 2.1 HW Decode: WMV9, AVC/H264, JPEG/MJPEG, HEVC/H265, VP9, AV1 HW Encode: AVC/H264, JPEG, HEVC/H265, VP9	
	Triple Displays	Intern + DP++ + HDMI	
<b>Expansion</b>	Interface	1 x PCIe x4 (Gen3 x4) Low Profile (only M2-PC-L)	
<b>Rear I/O</b>	Ethernet	3 x GbE (RJ-45)	Optional up to 5 x GbE
	USB	4 x USB 3.1 Gen2 (Type-A) 1 x USB 4.0 Type-C (Thunderbolt 3) (Support USB 3.1 Gen2, DP 1.4)	Optional up to 9 x USB
	Display	1 x DP++ 1 x HDMI	
	Audio	1 x Front Audio	
	Serial		Optional up to 4 x COM (RS232 or 422/485)
<b>Optional (M2 CB)</b>	Controller	M2 Controller Board	
	Feature	1 x Internal Alarm-Buzzer 1 x Out for ext. Alarm-Buzzer 1 x Potentiometer In, 2 x Push Button In 2 x Out for Status LED	
<b>Watchdog Timer</b>	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds	
<b>Security</b>	TPM	dTPM 2.0/TPM (Opt.)	
<b>Power Options</b>	DC	24 VDC	
	AC	230/115 VAC (50/60Hz)	
	DCAC	24 VDC, 230/115 VAC (50/60Hz)	
<b>OS Support</b>	Microsoft/ Linux	Windows 10 IoT Enterprise 64-bit Linux	
<b>Environment</b>	Operating Temp.	-15 to +55°C	
	Storage Temp.	-20 to +70°C	
	IP Rating	IP66 (front) - IP20 (rear)	
<b>Compass Safe Distance</b>	Standard Compass	1.10 m in all directions	
	Steering Compass	0.75 m in all directions	
<b>Type Approval</b>		DNV, Tested according to EN 60945 EU-RO-MR <sup>(*)</sup>	

(\*) expected Q1/2023



Options and additional features are configurable. Contact your Sonove sales representative for further information. Depending on the product configuration, interfaces or slot brackets may differ from the figures in this document.

# M2-PPC-24HB FM (TG)

11th Generation Intel® Core™ Processors



## Drawings

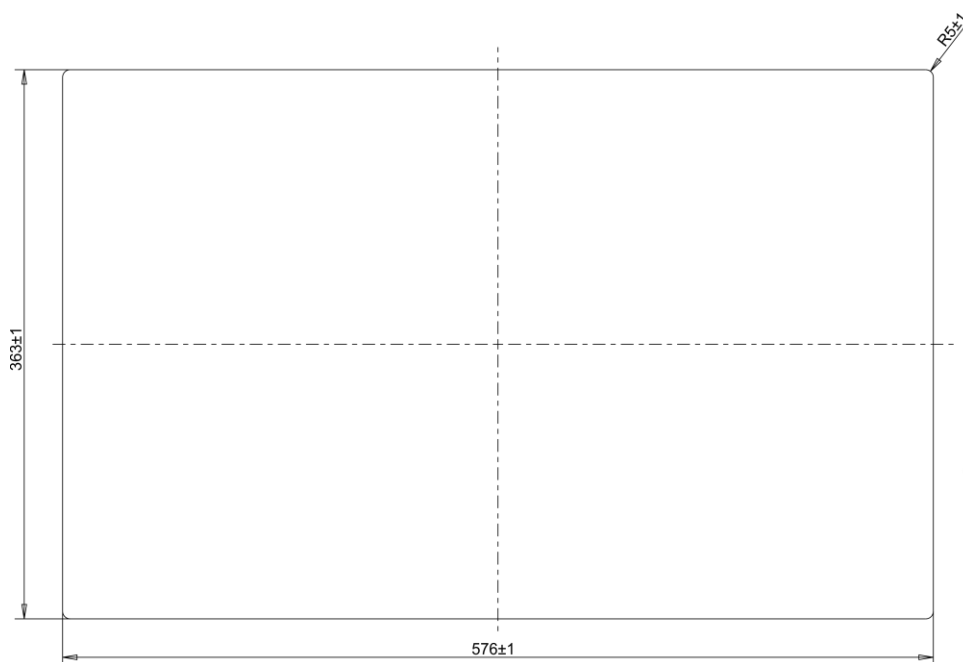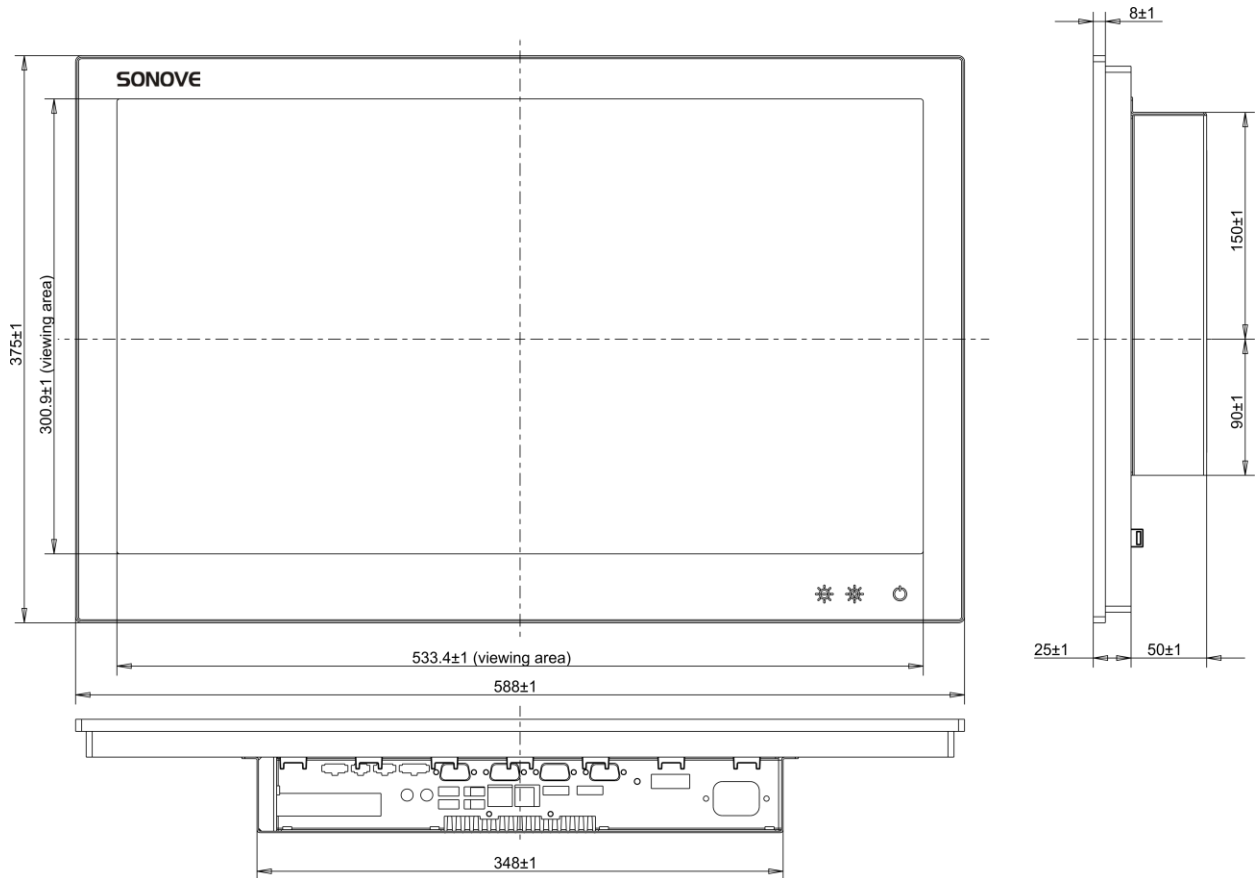

Sonove GmbH  
Hindelanger Str. 33  
87527 Sonthofen  
Deutschland

Tel. +49 8321 67466 200  
Fax +49 8321 67466 199  
marine@sonove.com