

M2C-M-17



Dimensions

- Width x Height x Depth: 430 x 390 x 78 mm
- Weight: 8,5 kg ± 10%

Housing

- Chassis: Aluminium, black anodized
- Cover electronics: Steel, RAL 9005 powder coated
- Front: Antireflex glass / Resistive Touch

Display

- 17" TFT Display
- Resolution: 1280 x 1024
- Brightness: 300 cd/m²
- Full range dimming: 0-100 %
- With or without Resistive Touch

Video Input		1 x DVI Input 1 x VGA Input	Optional up to 2 x DVI
Interface	Feature	1 x USB Touch 2 x USB back (connected to USB front) 2 x USB front (behind hatch)	
Power Options	DC	24 VDC	
	AC	230/115 VAC (50/60Hz)	
	DCAC	24 VDC, 230/115 VAC (50/60Hz)	
	Power Rating	30 VA	
Environment	Operating Temp.	-15 to +55 °C	
	Storage Temp.	-20 to +70 °C	
	IP Rating	IP66 (front) - IP20 (rear)	
Compass Safe Distance	Standard Compass	0.90 m in all directions	
	Steering Compass	0.70 m in all directions	
Type Approval		DNV, Tested according to EN 60945 EU-RO-MR ^(*)	


^(*) expected Q2/2024

Options and additional features are configurable. Contact your Sonove sales representative for further information. Depending on the product configuration, interfaces or slot brackets may differ from the figures in this document.

M2C-M-17







Drawings Standard

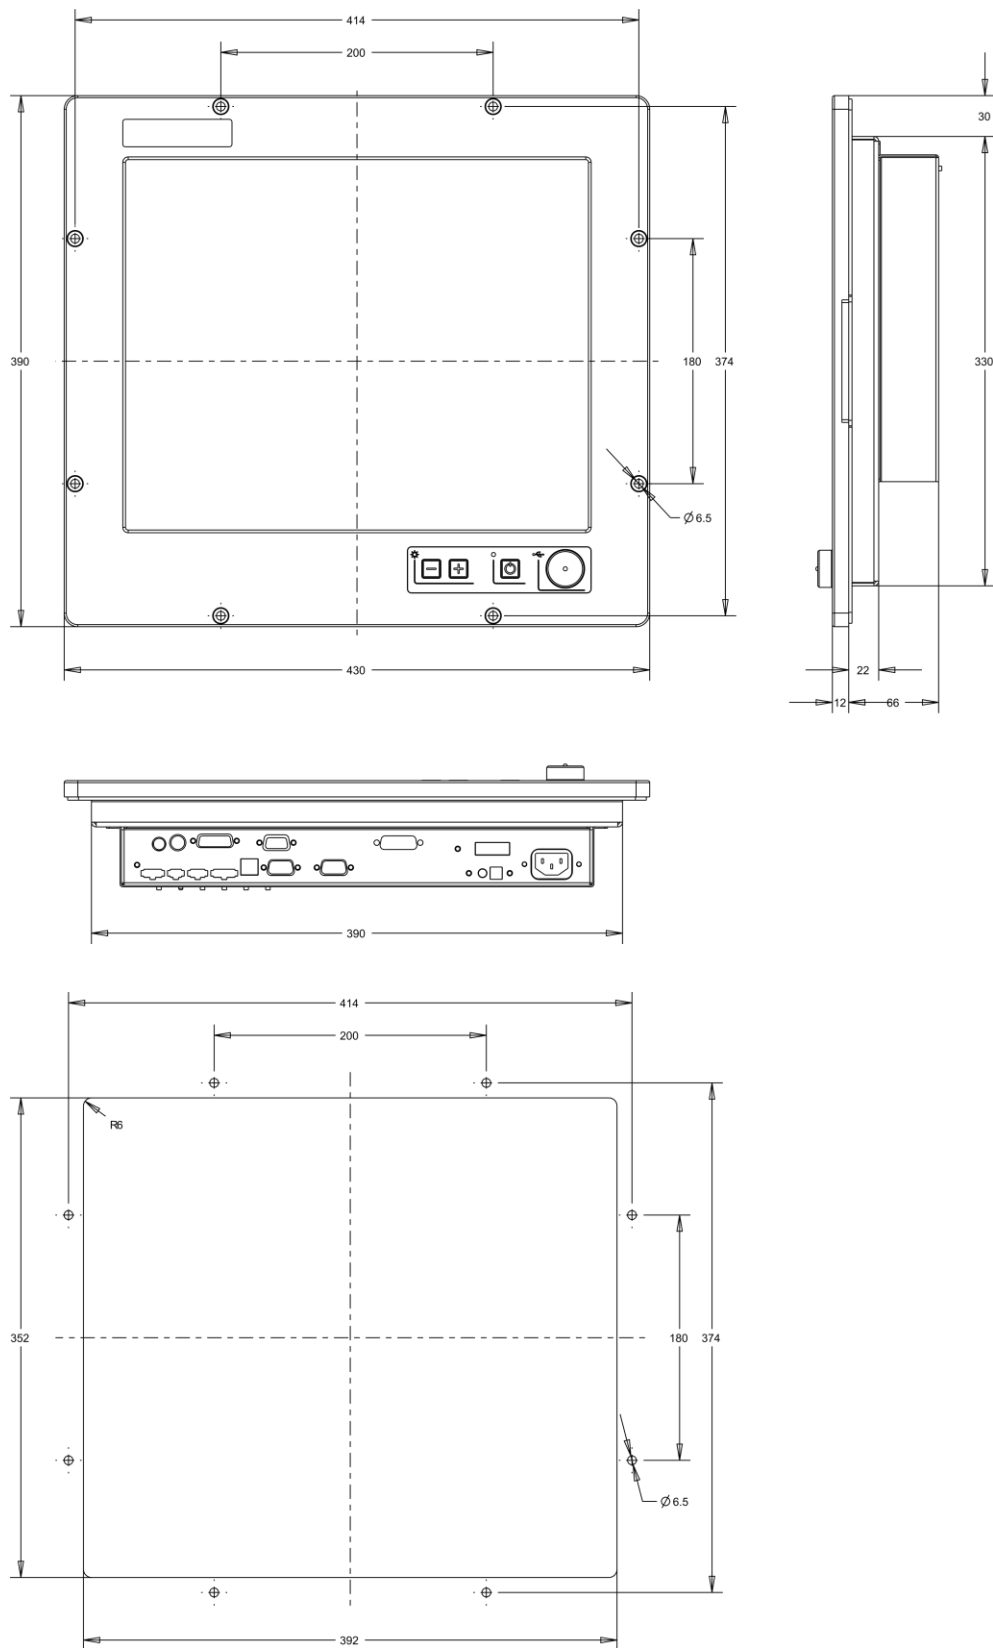

M2C-M-17



Drawings 4HF

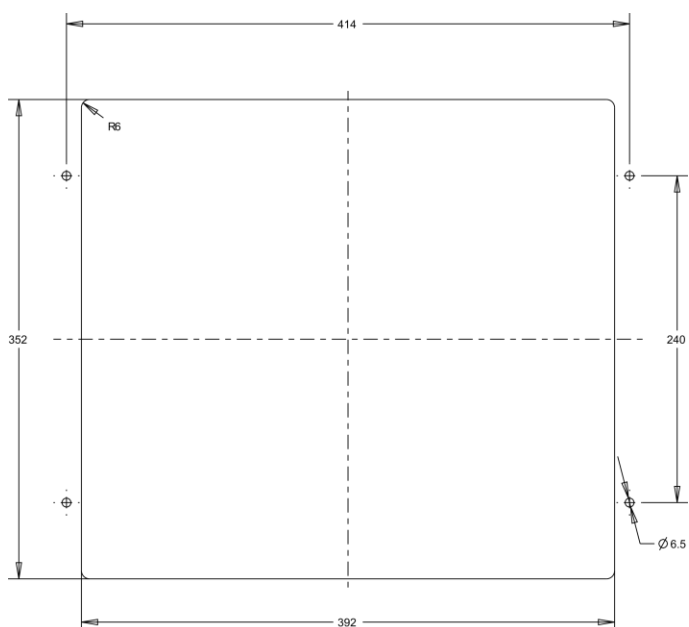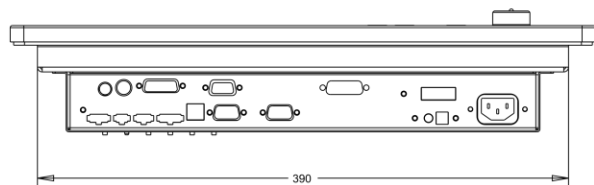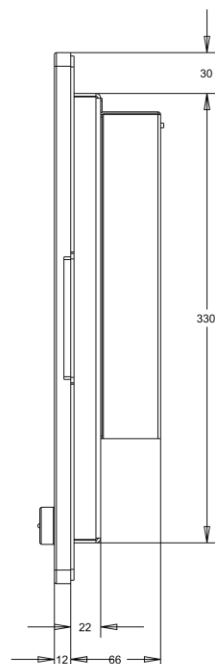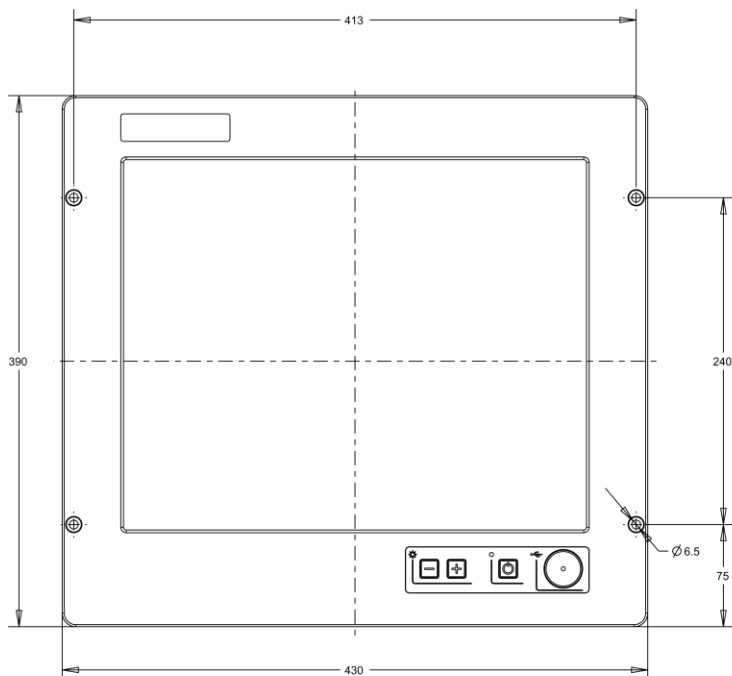

Sonove GmbH
Hindelanger Str. 33
87527 Sonthofen
Deutschland

Tel. +49 8321 67466 200
Fax +49 8321 67466 199
marine@sonove.com